



# Multiline **FLOOR LAMPS**



Easy to install


Perfect height range

Motion sensors

Varying light properties of diffusers

Stability tested


Dimming, alteration of colour temperature, wireless control; upon request

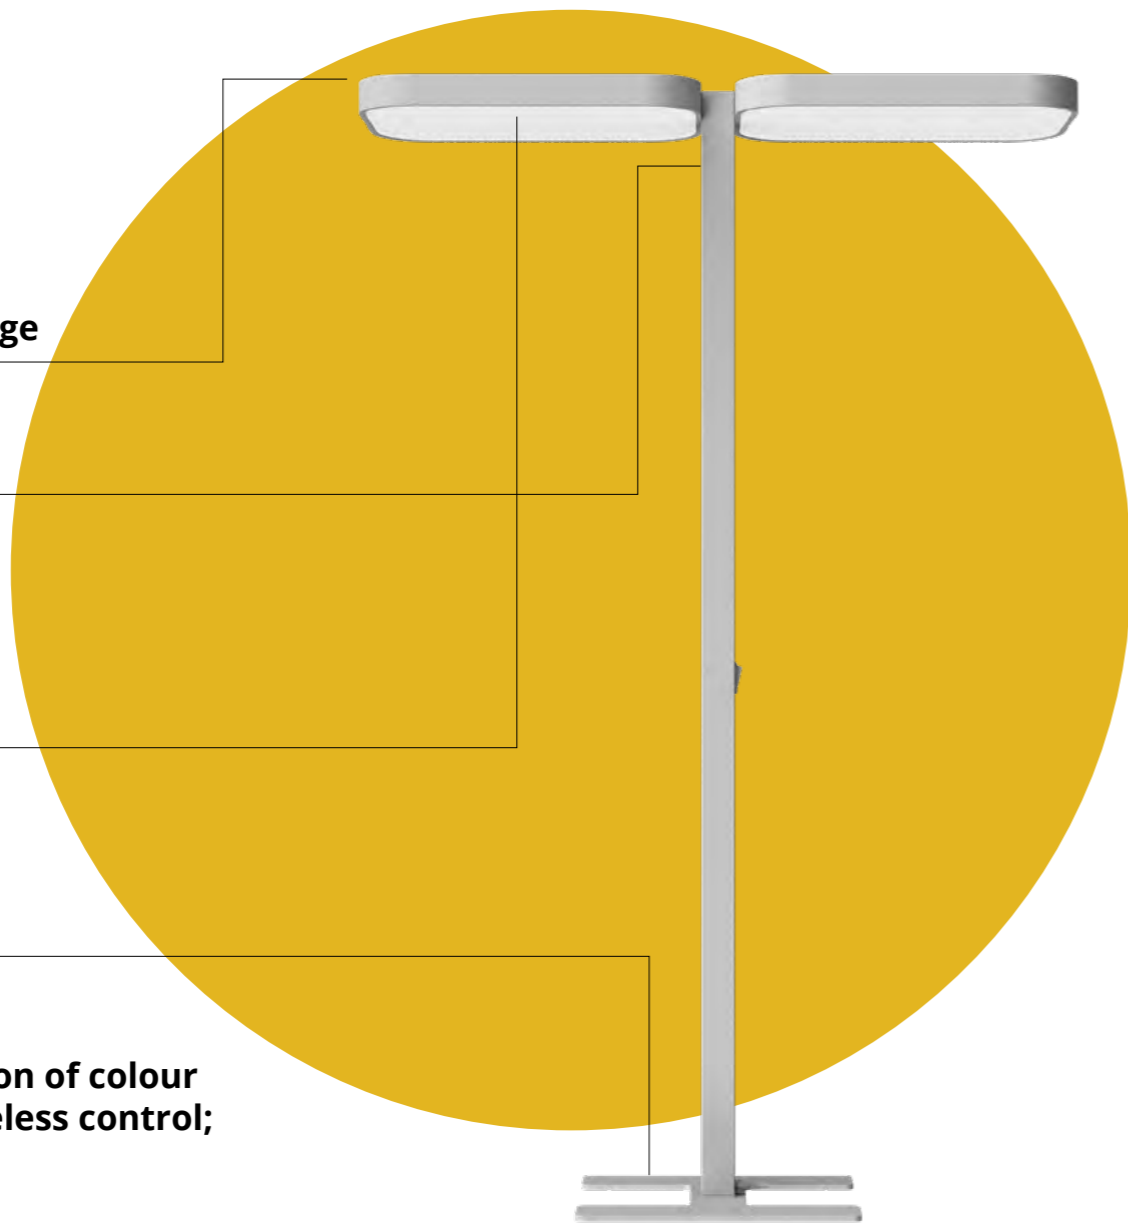



■ Floor luminaires with the height of 2000 mm and direct-indirect light distribution. The optical part of the luminaire is equipped with diffuser SATINE or MIKROPRIZMA with a light diffusing foil. There are two types of sensors available: motion sensors or daylighting responsive sensors with motion detection. The luminaire is suitable both for offices and residential areas. Depending on the customer's preference, the lamp can be equipped with dimming (DALI, Switch-DIM), tunable white or wireless Casambi control.






### Multiline C-F DI

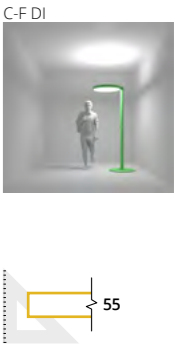

### Multiline L-F DI

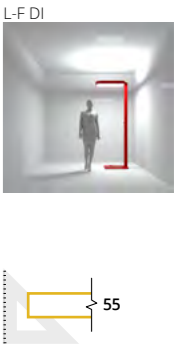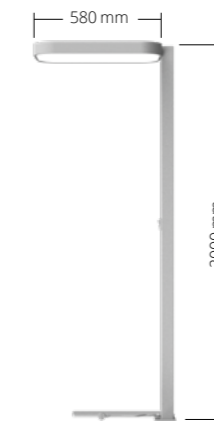

### Multiline 2L-F DI

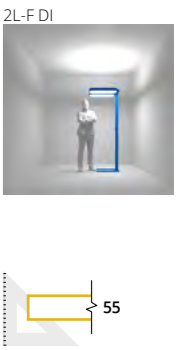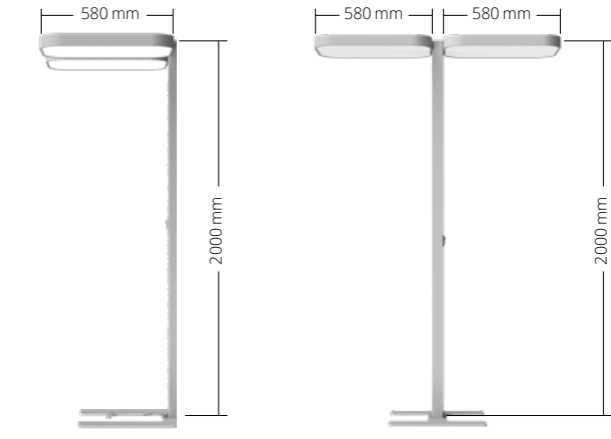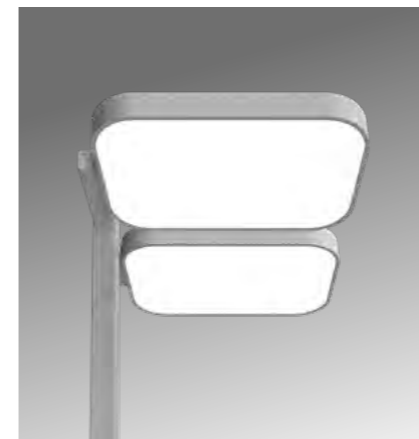

- LED IP40
- dimm
- TW 230 V 50 Hz
- F UGR ≤ 19

